


TAG: _____

SUBMITTAL

5.0 Ton

Multi-position Air Handler

J4AH5E61E1C00AA

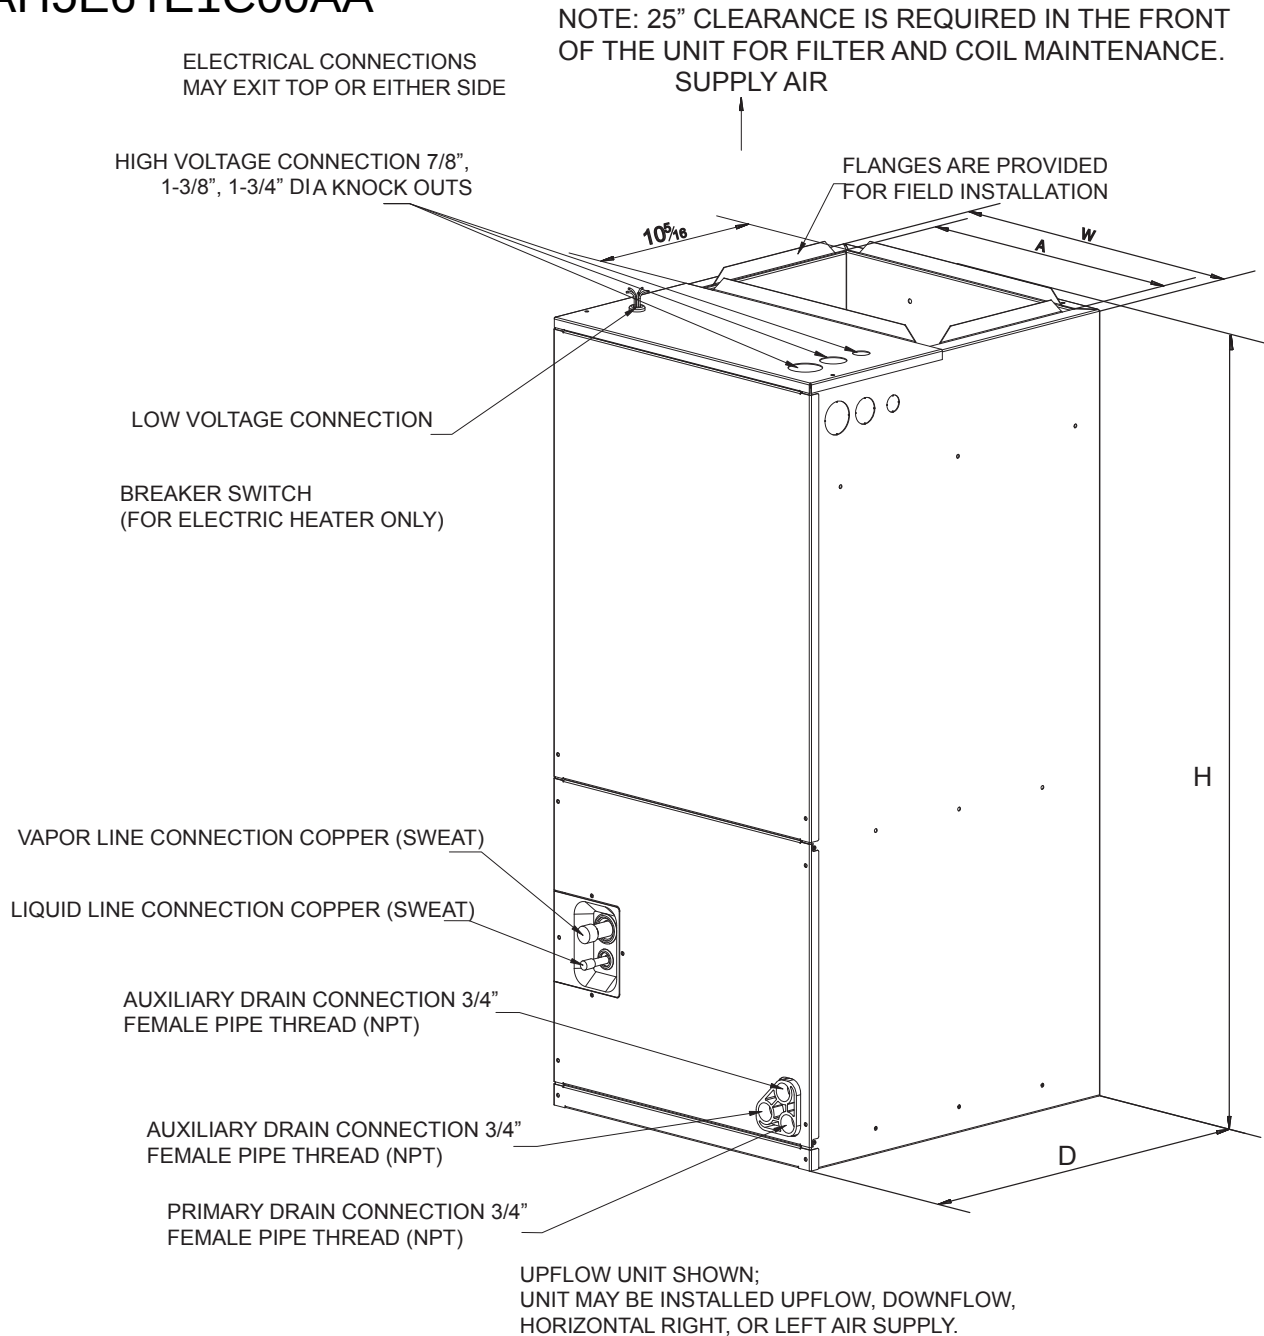

NOTE: All dimensions are in mm/inches.

Model	H	W	D	A
J4AH5E60E1C00AA	1385 (54-1/2)	560 (22)	610 (24)	496 (19-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
MODEL	J4AH5E61E1C00AA
RATED VOLTS/PH/HZ.	208-230/1/60
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	5 - 17
Face Area (sq. ft.)	5.99
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
INDOOR FAN — Type	Centrifugal
Diameter-Width (In.)	13X10-5/8
No. Used	1
Drive - No. Speeds	Direct - 5
CFM vs. in. w.g.	See Fan Performance Table
No. Motors — H.P.	1 - 3/4
Motor Speed R.P.M.	1050
Volts/Ph/HZ	208-230/1/60
F.L. Amps	5.2
FILTER	
Filter Furnished?	No
Type Recommended	Throwaway
No.-Size-Thickness	1 - 20 X 22 - 1 in.
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	55-3/16x24-11/16x27-11/16
Uncrated	54-1/2x22x24
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	179/161



Heater Kit Model Used	Electric Heat (kW)	Min. Circuit Ampacity		Max. Fuse or Breaker (HACR) Ampacity		Minimum Heating Blower Speed	
		240V	208V	240V	208V	Without HP	With HP
JAYHTR1A05BKR*	5	31.8	28.3	35	30	Low	Low
JAYHTR1A08BKR*	7.5	44.8	39.6	45	40	Low	Low
JAYHTR1A10BKR*	10	57.8	50.9	60	60	Low	Low
JAYHTR1A15BKR*	15	57.8/26.1	50.9/22.6	60/30	60/25	Low	Low
JAYHTR1A20BKR*	20	57.8/52.1	50.9/45.2	60/60	60/50	MIDDLE	MIDDLE

Note: Factory set at Medium High Speed.

Motor Speed	AIR FLOW PERFORMANCE									
	J4AH5E61E1C00AA									
	External Static Pressure-Inches W.C. (kPa)									
		0(.0)	0.1(.02)	0.2(.05)	0.3(.07)	0.4(.10)	0.5(.12)	0.6(.15)	0.7(.17)	0.8(.20)
1	CFM	1333	1277	1202	1149	1070	1002	933	903	809
2	CFM	1479	1424	1366	1310	1258	1184	1118	1067	991
3	CFM	1671	1625	1571	1517	1474	1426	1356	1283	1230
4	CFM	1889	1838	1796	1737	1689	1643	1592	1543	1488
5	CFM	2001	1963	1923	1866	1822	1780	1739	1677	1620

Mechanical Specifications

- Unique Cabinet Design
- Metal shell and glass cotton thermal insulation layer
- Multi-Position UP/Down Flow Horizontal Left /Right
- Braze in Refrigerant Connection
- Primary/Secondary Condensate Connections
- Blower with Integrated Slide Deck for Easy Removal
- Inner-groove aluminum tube and high-efficiency aluminum fin Coil with Integrated Slide Deck for Easy Removal
- More auxiliary Electric Heaters optional
- ECM5 Speed Motor
- High Efficiency
- Integrated Horizontal Drain pans and metal Vertical Drain
- Fused 24V Power
- Suitable for Manufactured/Mobile Home Use.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J4AH5E61E1C00A-1A