




J4PG4030E1060AA

TAG:

# SUBMITTAL

# 2.5 Ton High-Efficiency Gas Package Unit J4PG4030E1060AA

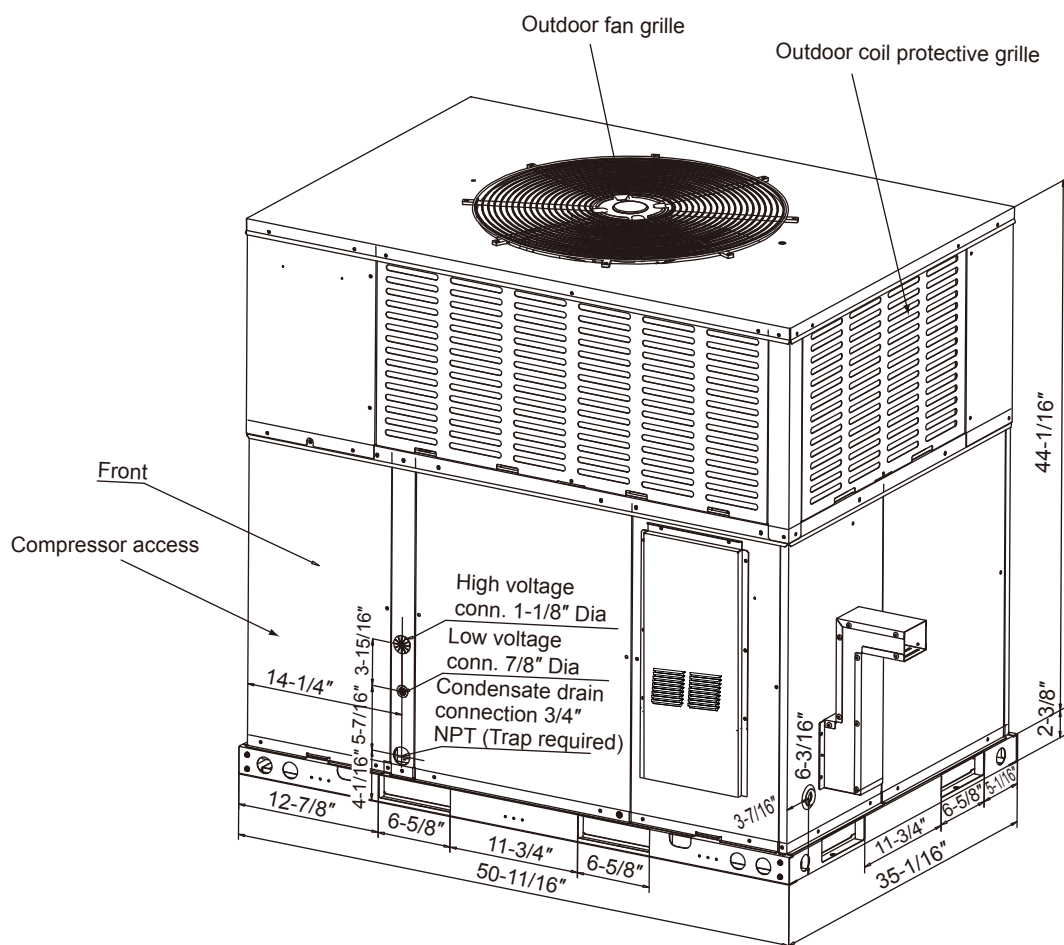

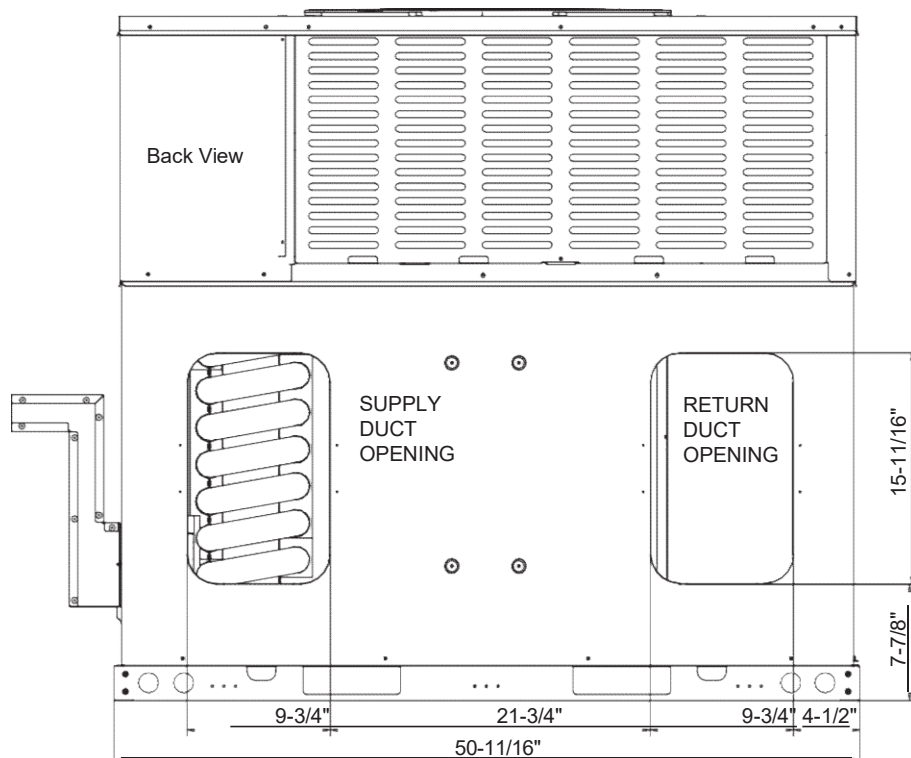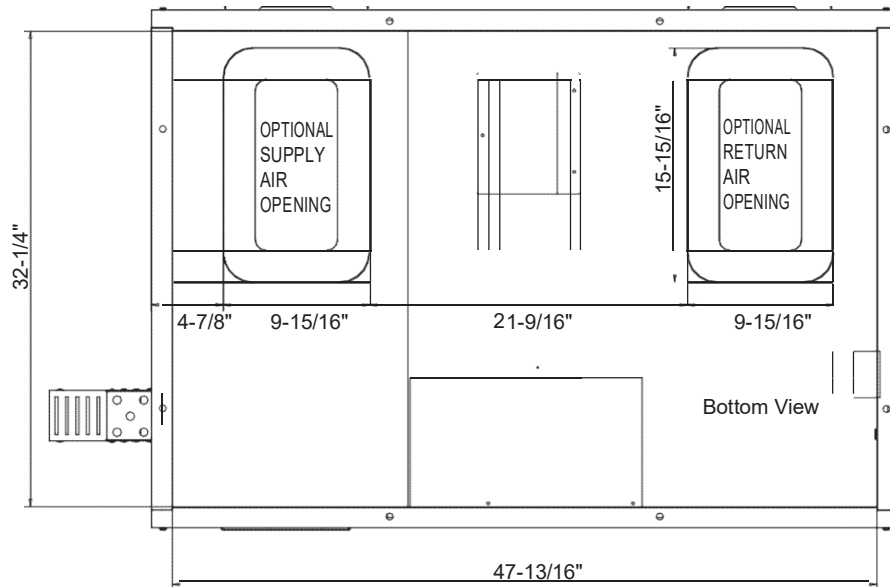

**Dimensions Back and Bottom**

## PRODUCT SPECIFICATIONS

## Specifications

|                              |                 |
|------------------------------|-----------------|
| MODEL                        | J4PG4030E1060AA |
| POWER CONNS. - V/PH/HZ RATED | 208/230/1/60    |
| CURRENT                      | 21              |
| MAXIMUM OVER PROTECTOR       | 30              |
| SOUND POWER LEVEL[dB(A)]     | 79              |

## GAS HEATING PERFORMANCE

|                       |         |
|-----------------------|---------|
| HEATING INPUT (Btu)   | 60,000  |
| HEATING OUTPUT (Btu)  | 48,000  |
| TEMP. RISE RANGE (°F) | 30-60   |
| AFUE (%)              | 81      |
| GAS CONNS. PIPE SIZE  | 1/2 NPT |

|                      |              |
|----------------------|--------------|
| COMPRESSOR           | ROTARY       |
| NO. USED- NO. SPEEDS | 1-1          |
| VOLTS/PH/HZ          | 208/230/1/60 |
| R.L. AMPS- L.R. AMPS | 13 - 58      |

|                        |              |
|------------------------|--------------|
| CONDENSER FAN DIA.     | PSC          |
| (IN.)                  | 23.6         |
| TYPE DRIVE- NO. SPEEDS | AC - 1       |
| MOTOR HP               | 1/6          |
| MOTOR SPEED R.P.M.     | 850          |
| VOLTS/PH/HZ            | 208/230/1/60 |
| F.L. AMPS              | 1            |

|                     |              |
|---------------------|--------------|
| CONDENSER COIL      | Microchannel |
| ROWS- F.P.I.        | 1-21         |
| FACE AREA (SQ. FT.) | 6.99         |
| TUBE SIZE (IN.)     | 20/32        |

|                    |                           |
|--------------------|---------------------------|
| EVAPORATOR FAN     | ECM                       |
| DRIVE- NO. SPEEDS  | DIRECT - 5                |
| CFM VS. IN. WG.    | See Fan Performance Table |
| MOTOR HP           | 1/2                       |
| MOTOR SPEED R.P.M. | 1050                      |
| VOLTS/PH/HZ        | 208/230/1/60              |
| F.L. AMPS          | 4.2                       |

|                     |                   |
|---------------------|-------------------|
| EVAPORATOR COIL     | Aluminum tube&fin |
| ROWS- F.P.I.        | 4 - 17            |
| FACE AREA (SQ. FT.) | 3.93              |
| TUBE SIZE (IN.)     | 9/32              |
| REFRIGERANT CONTROL | ORIFICE           |

**REFRIGERANT**

LBS. - R-410                      3 LBS. - 4.9 OZ.

## DIMENSIONS

CRATED (IN.) 50-11/16X46-13/16X35-1/1

## WEIGHT

|                 |     |
|-----------------|-----|
| SHIPPING (LBS.) | 450 |
| NET (LBS.)      | 437 |

### Fan Performance Table

[illegible]

## Features

---

- Single-stage gas (LP conversion kit provided with each unit) heating.
- Bottom or side air return.
- Aluminized steel tubular heat exchanger.
- Quiet multi-speed circulation blower.
- Direct spark ignition
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

**BX-PRQ-J4PG4030E1060A-1A**