






J4PG4060E1110AA

TAG: _____

SUBMITTAL

5.0 Ton
High-Efficiency Gas Package Unit
J4PG4060E1110AA

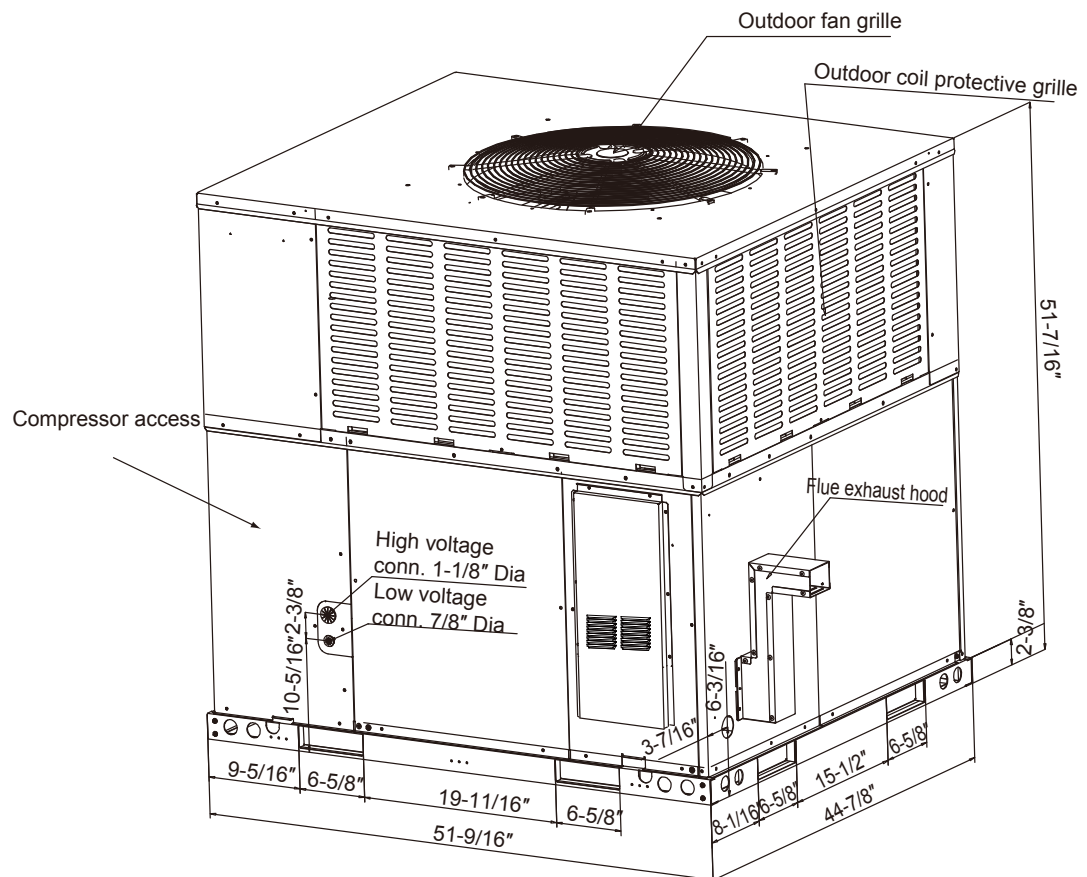

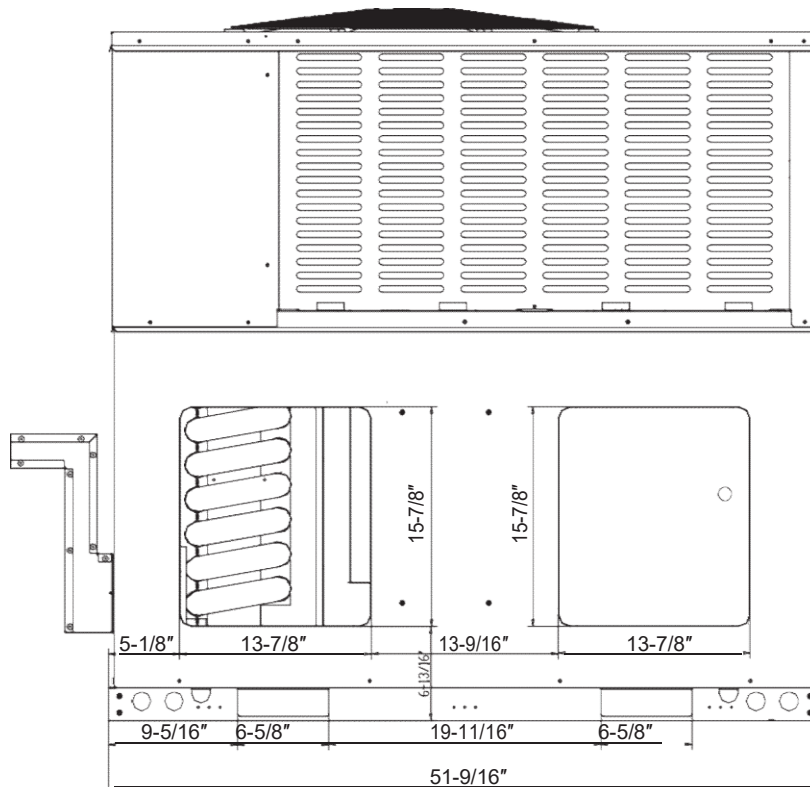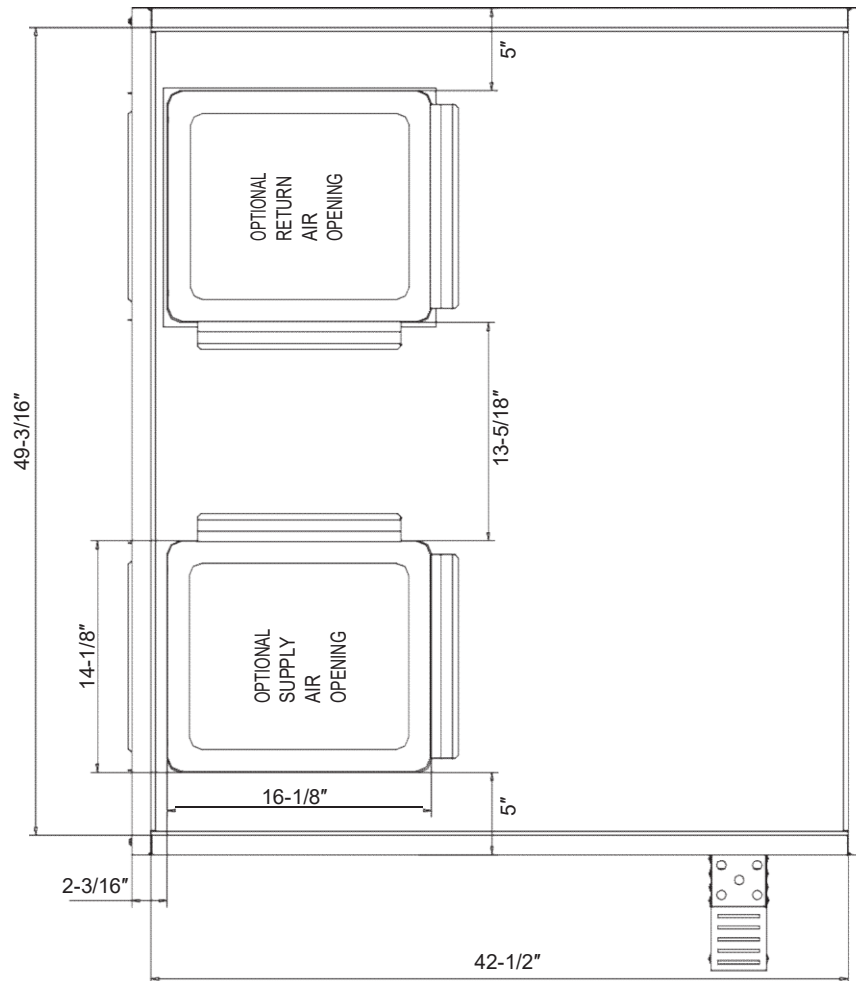

Dimensions Back and Bottom

PRODUCT SPECIFICATIONS

Specifications

MODEL	J4PG4060E1110AA
POWER CONNS. - V/PH/HZ	208/230/1/60
RATED CURRENT	37
MAXIMUM OVER PROTECTOR	60
SOUND POWER LEVEL[dB(A)]	80
GAS HEATING PERFORMANCE	
HEATING INPUT (Btu)	110,000
HEATING OUTPUT (Btu)	88,000
TEMP. RISE RANGE (°F)	30-60
AFUE (%)	81
GAS CONNS. PIPE SIZE	1/2NPT
COMPRESSOR	SCROLL
NO. USED- NO. SPEEDS	1-1
VOLTS/PH/HZ	208/230/1/60
R.L. AMPS- L.R. AMPS	23.5 - 127.9
CONDENSER FAN	PSC
DIA. (IN.)	26
TYPE DRIVE- NO. SPEEDS	AC - 1
MOTOR HP	1/3
MOTOR SPEED R.P.M.	1050
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	1.9
CONDENSER COIL	Microchannel
ROWS- F.P.I.	1-21
FACE AREA (SQ. FT.)	10.1
TUBE SIZE (IN.)	20/32

EVAPORATOR FAN	ECM
DRIVE- NO. SPEEDS	DIRECT - 5
CFM VS. IN. WG.	See Fan Performance Table
MOTOR HP	3/4
MOTOR SPEED R.P.M.	1050
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	5.7
EVAPORATOR COIL	Aluminum tube&fin
ROWS- F.P.I.	2 - 17
FACE AREA (SQ. FT.)	6.17
TUBE SIZE (IN.)	9/32
REFRIGERANT CONTROL	ORIFICE
REFRIGERANT	
LBS. - R-410	4 LBS. - 10.1 OZ.
DIMENSIONS	W X H X D
CRATED (IN.)	51-9/16X51-7/16X44-13/16
WEIGHT	
SHIPPING (LBS.)	613
NET (LBS.)	569

Fan Performance Table

Model Number	Motor Speed	External Static Pressure-Inches W.C.[kPa]											
			0[0]	0.1[.02]	0.20.1[.05]	0.30.1[.07]	0.40.1[.10]	0.50.1[.12]	0.60.1[.15]	0.70.1[.17]	0.80.1[.20]	0.90.1[.23]	1.00.1[.25]
60 (110)	Middle-2 (Tap3)	CFM	1547	1473	/	/	/	/	/	/	/	/	/
		Current/A	2.8	2.87	/	/	/	/	/	/	/	/	/
		Power/W	340	350	/	/	/	/	/	/	/	/	/
	Middle-3 (Tap4)	CFM	1789	1741	1695	1649	1605	1559	1510	1460	/	/	/
		Current/A	4.11	4.19	4.28	4.36	4.45	4.54	4.64	4.74	/	/	/
		Power/W	517	528	540	551	564	576	589	603	/	/	/
	High (Tap5)	CFM	2035	1976	1927	1875	1815	1755	1696	1630	1563	1490	1438
		Current/A	5.66	5.74	5.81	5.85	5.82	5.79	5.76	5.73	5.71	5.68	5.66
		Power/W	733	744	754	758	754	750	745	741	737	733	730

Features

- Single-stage gas (LP conversion kit provided with each unit) heating.
- Bottom or side air return.
- Aluminized steel tubular heat exchanger.
- Quiet multi-speed circulation blower.
- Direct spark ignition
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J4PG4060E1110A-1A