


TAG: _____

SUBMITTAL

3.0 Ton Heat Pump Package Units J4PH4036E1000AA

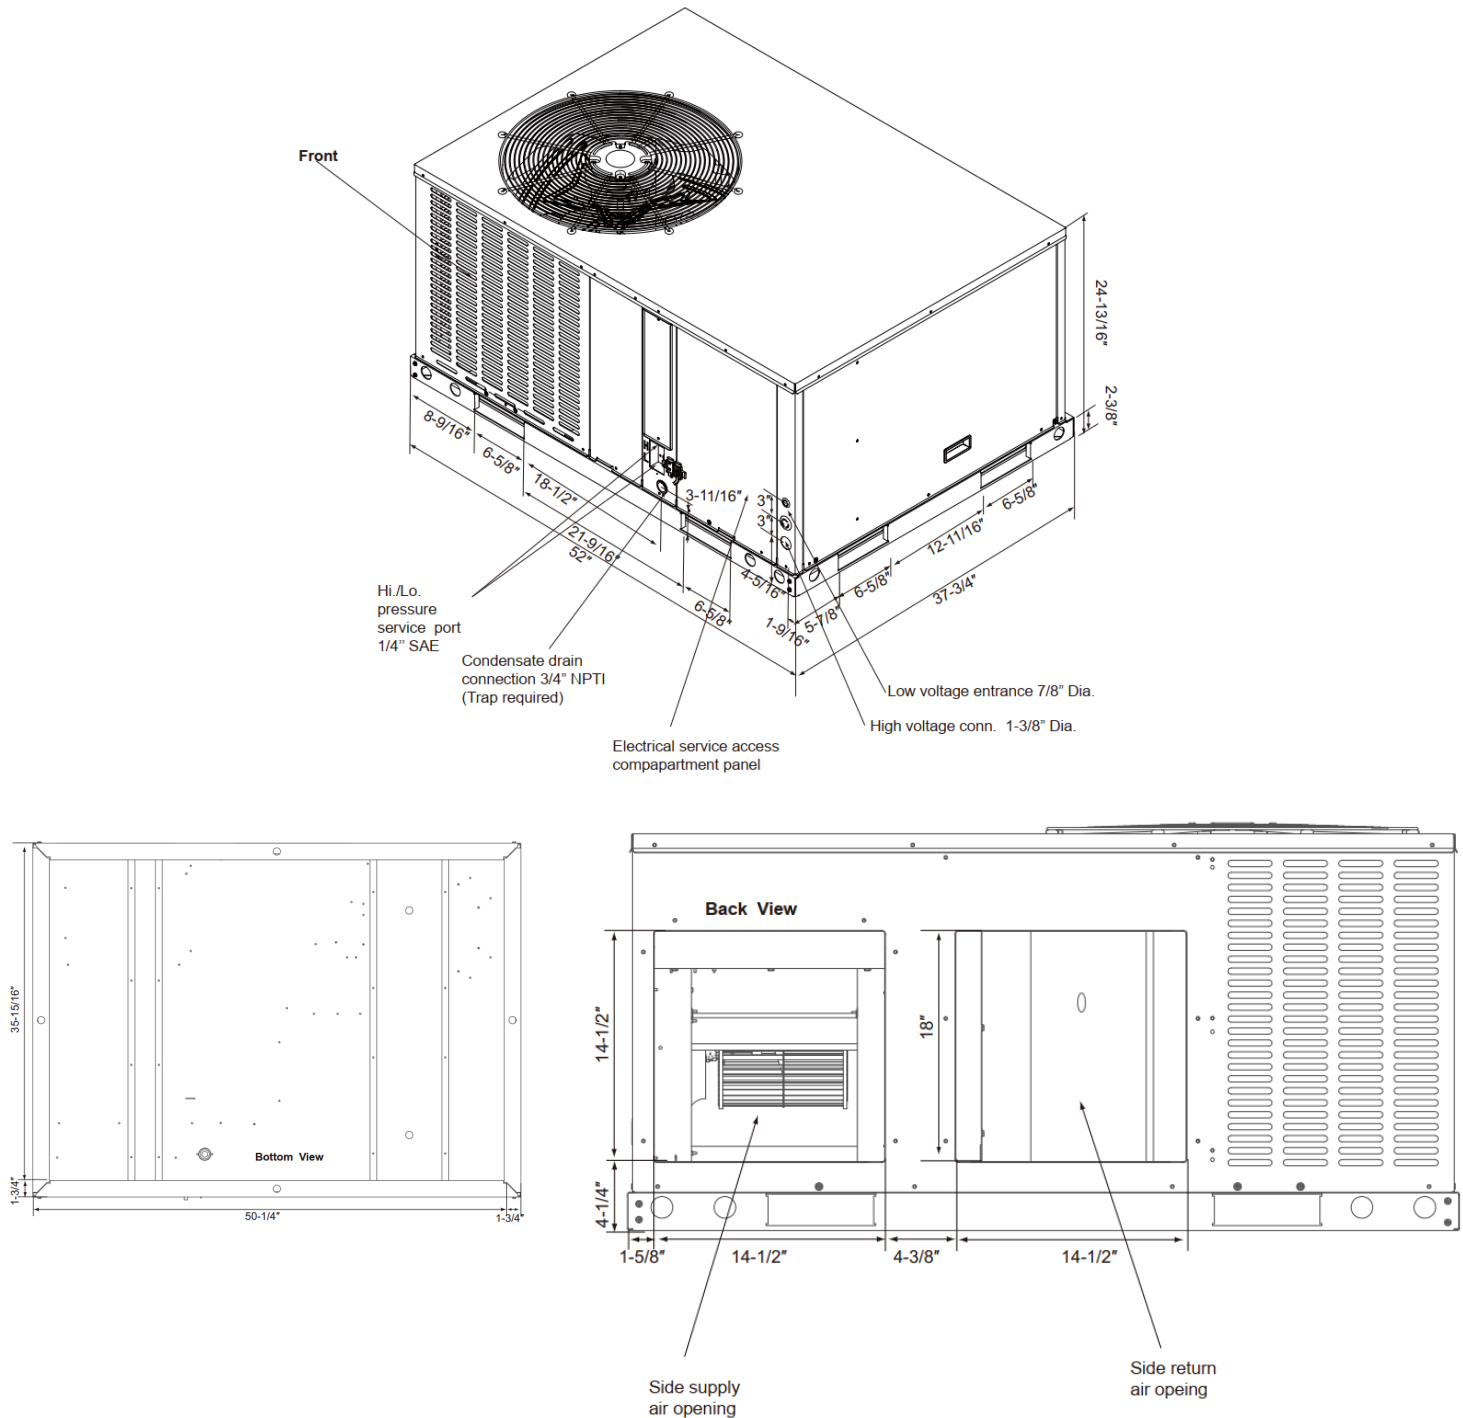

PRODUCT SPECIFICATIONS

Specifications

MODEL	J4PH4036E1000AA
POWER CONNS. - V/PH/HZ	208/230/1/60
MIN. BRCH. CIR. AMPACITY	21.55
BR. CIR. PROT. RTG. - MAX. (AMPS)	34.55
SOUND POWER LEVEL [dB(A)]	81
COMPRESSOR	SCROLL
NO. USED- NO. SPEEDS	1-1
VOLTS/PH/HZ	208/230/1/60
R.L. AMPS- L.R. AMPS	13.0 - 75
FACTORY INSTALLED	
START COMPONENTS	NO
INSULATION/SOUND BLANKET	NO
COMPRESSOR HEAT	NO
OUTDOOR FAN	
DIA. (IN.)	22
TYPE DRIVE- NO. SPEEDS	DIRECT - 10
MOTOR HP	1/4
MOTOR SPEED R.P.M.	200~980
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	1.0
OUTDOOR COIL- TYPE	PLATE FIN
ROWS- F.P.I.	2.5 - 1.2
FACE AREA (SQ. FT.)	9.44
TUBE SIZE (IN.)	13 / 64

INDOOR FAN- TYPE	Centrifugal -ECM
DRIVE- NO. SPEEDS	DIRECT - 5
CFM VS. IN. WG.	See Fan Performance Table
MOTOR HP	1/2
MOTOR SPEED R.P.M.	1050
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	4.3
INDOOR COIL- TYPE	PLATE FIN-all AL
ROWS- F.P.I.	4 - 1.5
FACE AREA (SQ. FT.)	3.63
TUBE SIZE (IN.)	9/32
REFRIGERANT CONTROL	ORIFICE
REFRIGERANT	
LBS. - R-410 (O.D. UNIT)	4 LBS.-13 OZ..
DIMENSIONS	W X H X D
CRATED (IN.)	52-3/4X25-13/16X38
WEIGHT	
SHIPPING (LBS.)	349
NET (LBS.)	342

Optional Heater

Heater Kit Model Used	Electric Heat (kW)	Min. Circuit Ampacity		Max. Fuse or Breaker (HACR) Ampacity	
		208V	240V	208V	240V
JAYHTR1P05BKRA	5	23	26	25	30
JAYHTR1P08BKRA	7.5	34	40	35	40
JAYHTR1P10BKRA	10	36.1	41.7	46	53
JAYHTR1P15BKRA	15	54.2	62.5	68	79

Fan Performance Table

Motor Speed	AIR FLOW PERFORMANCE								
	J4PH4036A1000AA								
	External Static Pressure-Inches W.C. (kPa)								
		0(0)	0.1(.02)	0.2(.05)	0.3(.07)	0.4(.10)	0.5(.12)	0.6(.15)	0.7(.17)
Low	CFM	1123	1080	1036	987	948	-	-	-
Medium	CFM	1266	1223	1195	1152	1131	1075	1030	994
High	CFM	1389	1365	1325	1288	1256	1220	1181	1145

Features

- 2-5 ton capacities available
- High-efficiency 13.4 SEER2 ratings
- Architectural, anti-rust steel cabinets, tested to withstand 1,000-hour salt spray
- Quiet horizontal discharge
- High-efficiency compressors operate smoothly, quietly, consistently
- Auxiliary electric heaters available as a field installed option: 5kW,8kW,10kW,15kW,20kW (available heater sizes vary depending on model tonnage)
- Suitable for Manufactured/Mobile Home Use



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J4PH4036E1000A-1A