

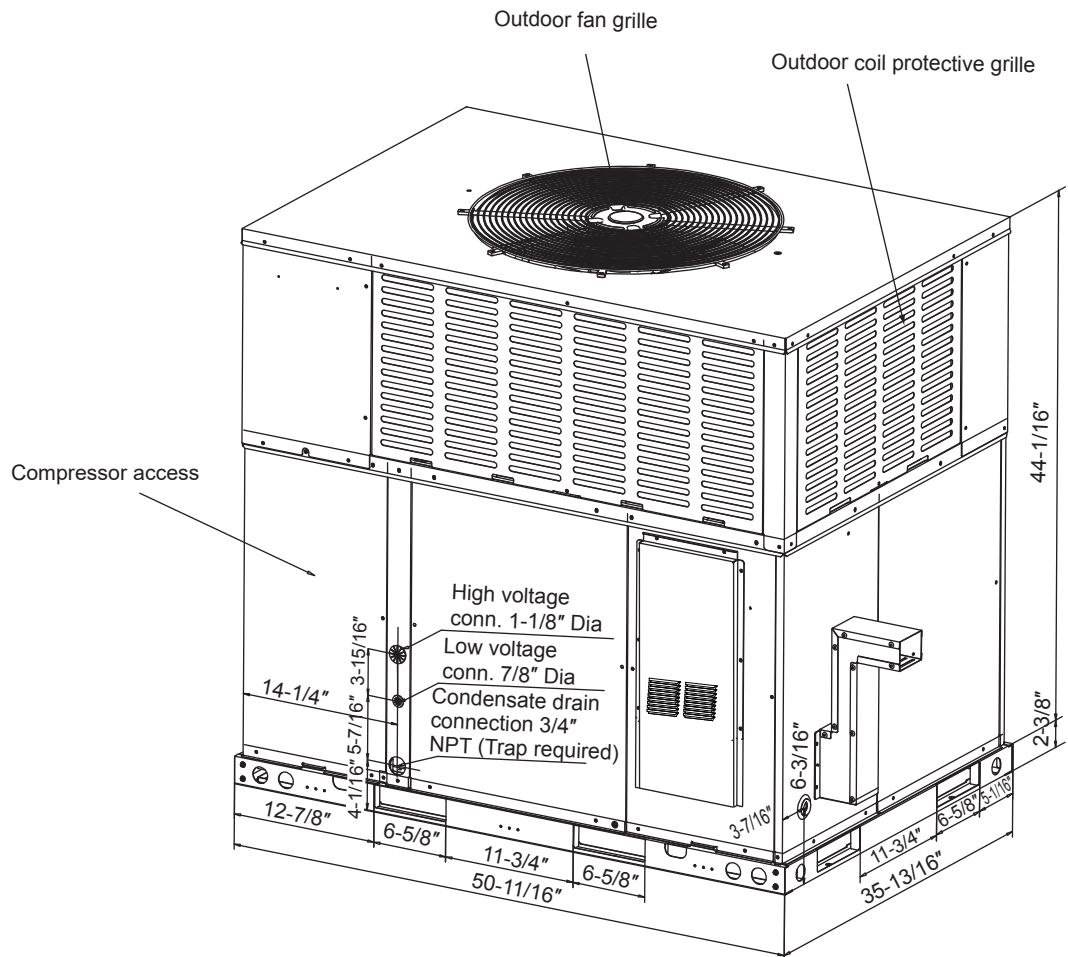


TAG: _____

SUBMITTAL

2.0 Ton High-Efficiency Gas Package Unit J4PG4024B1060AA

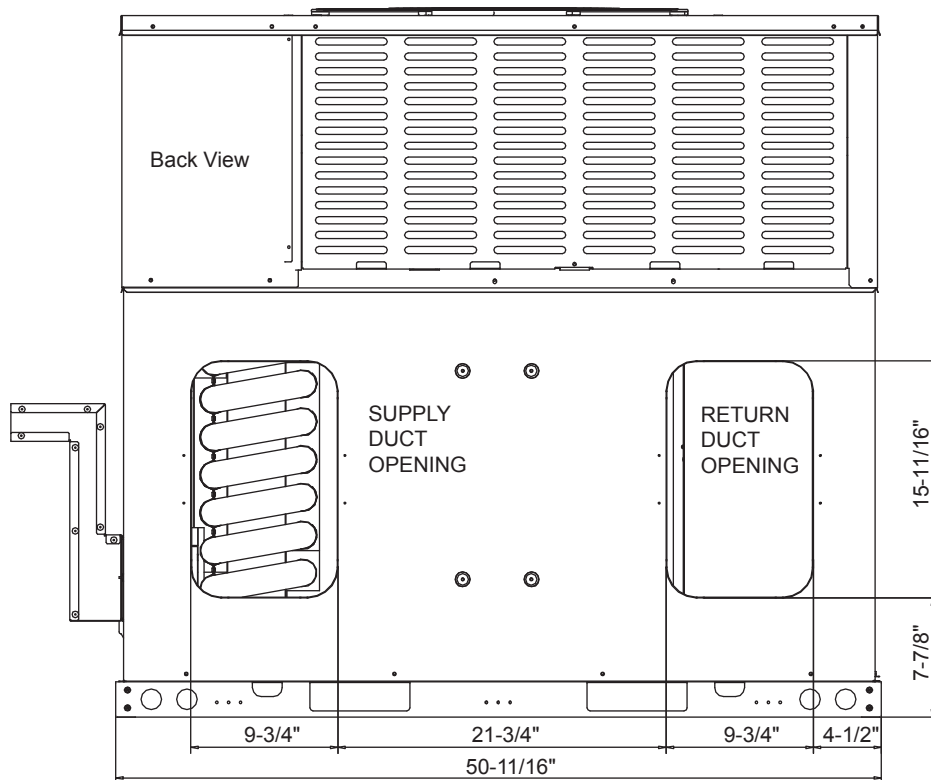

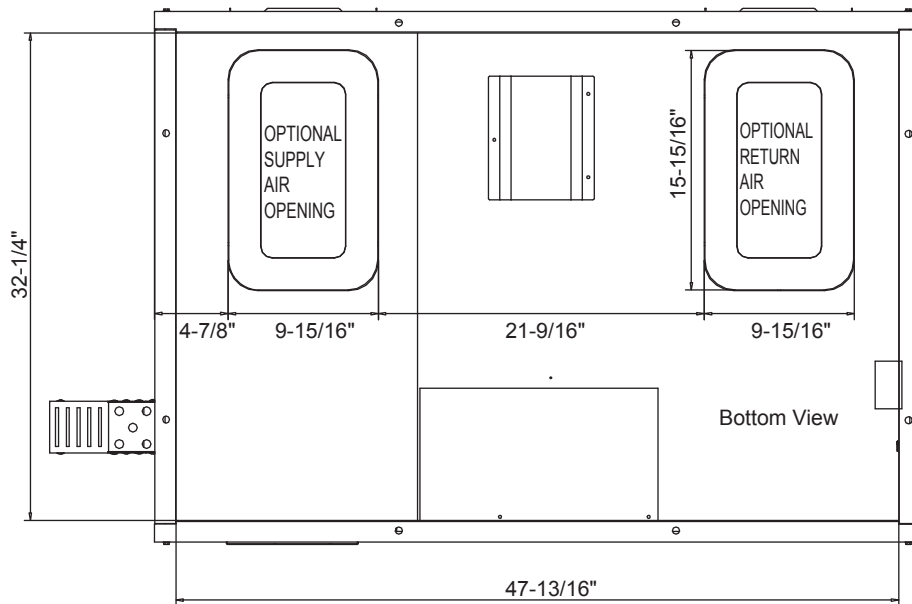

Dimensions Back and Bottom

PRODUCT SPECIFICATIONS

Specifications

MODEL	J4PG4024B1060AA
POWER CONNS. - V/PH/HZ	208/230/1/60
RATED CURRENT	14
MAXIMUM OVER PROTECTOR	20
SOUND POWER LEVEL [dB(A)]	53.2
GAS HEATING PERFORMANCE	
HEATING INPUT (Btu)	60,000
HEATING OUTPUT (Btu)	48,000
TEMP. RISE RANGE (°F)	35-65
AFUE (%)	81
GAS CONNS. PIPE SIZE	1/2
COMPRESSOR	ROTARY
NO. USED- NO. SPEEDS	1-1
VOLTS/PH/HZ	208/230/1/60
R.L. AMPS- L.R. AMPS	8.8 - 34.8
CONDENSER FAN	
DIA. (IN.)	23.5
TYPE DRIVE- NO. SPEEDS	DIRECT - 3
MOTOR HP	1/7
MOTOR SPEED R.P.M.	1075
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	0.8
CONDENSER COIL	Copper tube
ROWS- F.P.I.	1.5-17
FACE AREA (SQ. FT.)	14.11
TUBE SIZE (IN.)	9/32

EVAPORATOR FAN	
DRIVE- NO. SPEEDS	DIRECT - 3
CFM VS. IN. WG.	See Fan Performance Table
MOTOR HP	1/5
MOTOR SPEED R.P.M.	1075
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	1.7
EVAPORATOR COIL	
ROWS- F.P.I.	2- 17
FACE AREA (SQ. FT.)	3.96
TUBE SIZE (IN.)	9/32
REFRIGERANT CONTROL	ORIFICE
REFRIGERANT	
LBS. - R-410	4 LBS. - 13.6 OZ.
DIMENSIONS	
CRATED (IN.)	50-11/16X46-13/16X35-1/16
WEIGHT	
SHIPPING (LBS.)	455.4
NET (LBS.)	433.4

Fan Performance Table

Model Number	Motor Speed	External Static Pressure-Inches W.C.[kPa]									
			0[0]	0.1[.02]	0.2[.05]	0.3[.07]	0.4[.10]	0.5[.12]	0.6[.15]	0.7[.17]	0.8[.20]
24	Low	CFM	900	840	760	680	600	/	/	/	/
		Current/A	1.0	1.0	1.0	1.0	1.0	/	/	/	/
		Power/W	234	230	227	223	220	/	/	/	/
	Middle	CFM	/	/	/	890	798	708	618	/	/
		Current/A	/	/	/	1.4	1.4	1.35	1.3	/	/
		Power/W	/	/	/	318	312	306	300	/	/
	High	CFM	/	/	/	/	920	830	745	670	600
		Current/A	/	/	/	/	1.8	1.8	1.7	1.7	1.7
		Power/W	/	/	/	/	396	389	383	375	370

Features

- Single-stage gas (LP conversion kit provided with each unit) heating.
- Bottom or side air return.
- Aluminized steel tubular heat exchanger.
- Quiet multi-speed circulation blower.
- Direct spark ignition
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J4PG4024B1060A-1A