

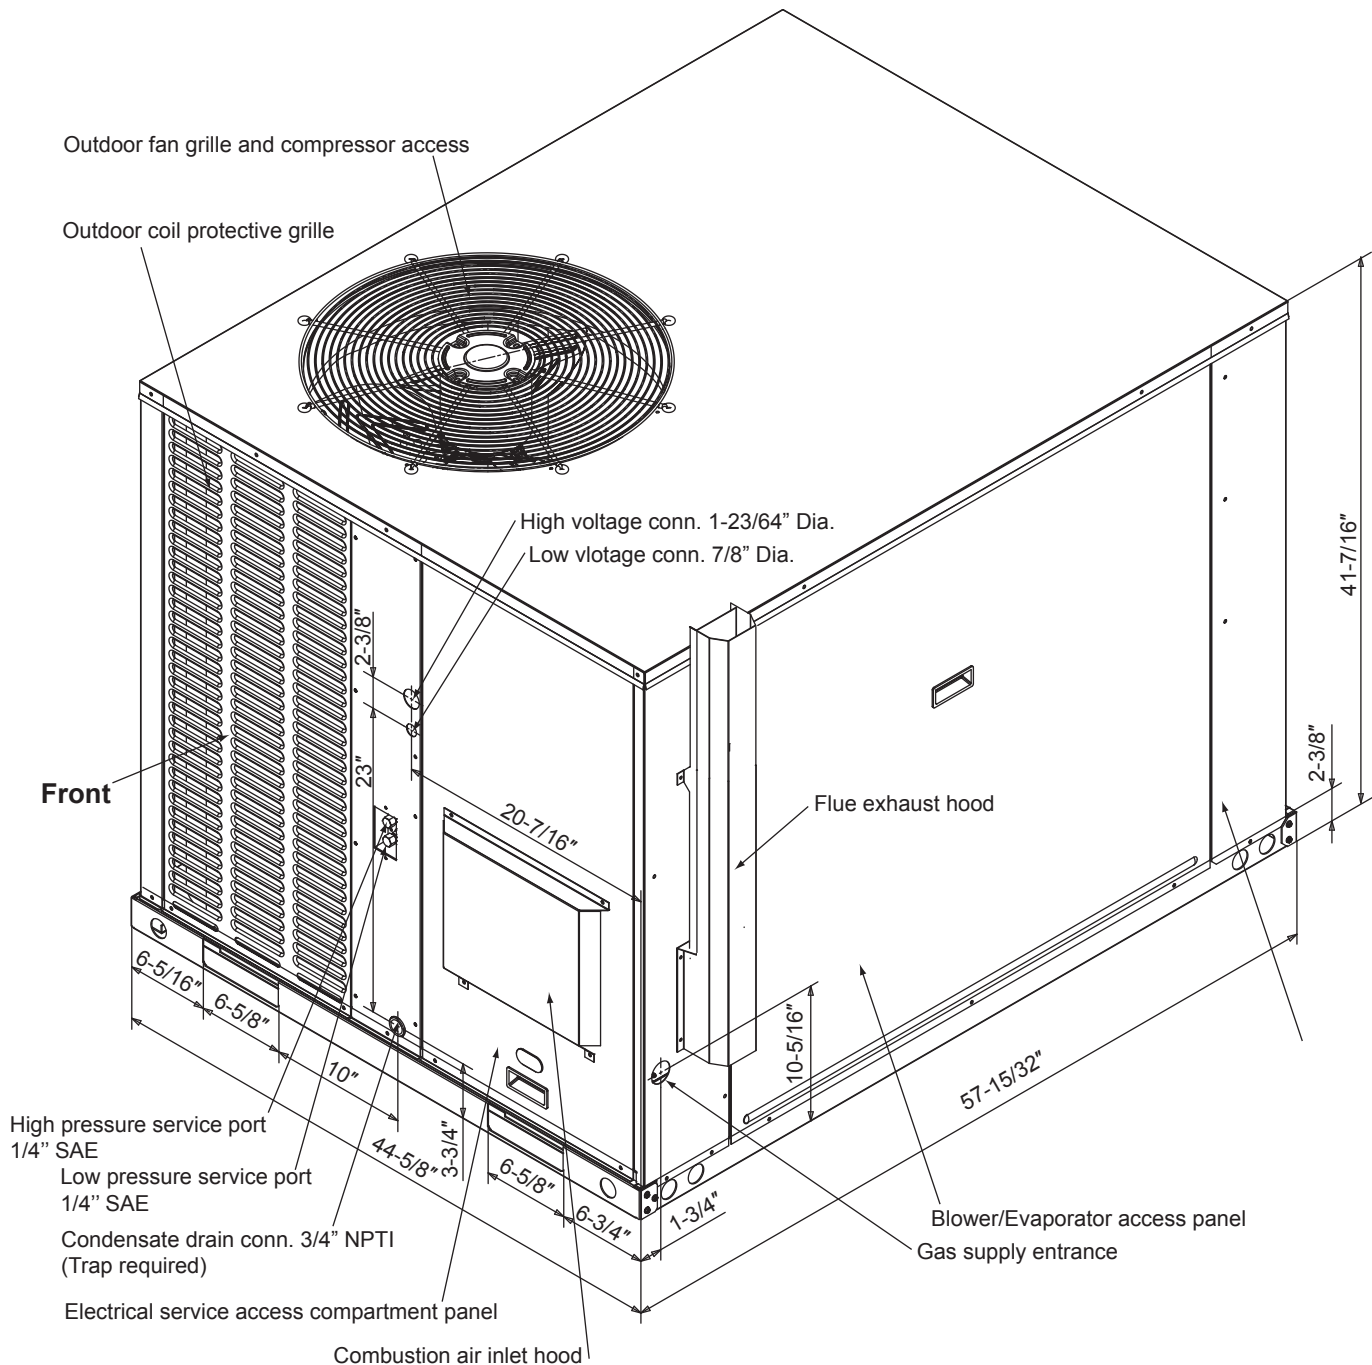


TAG: _____

SUBMITTAL

4.0 Ton High-Efficiency Gas Package Unit J4PG4048A1090BA

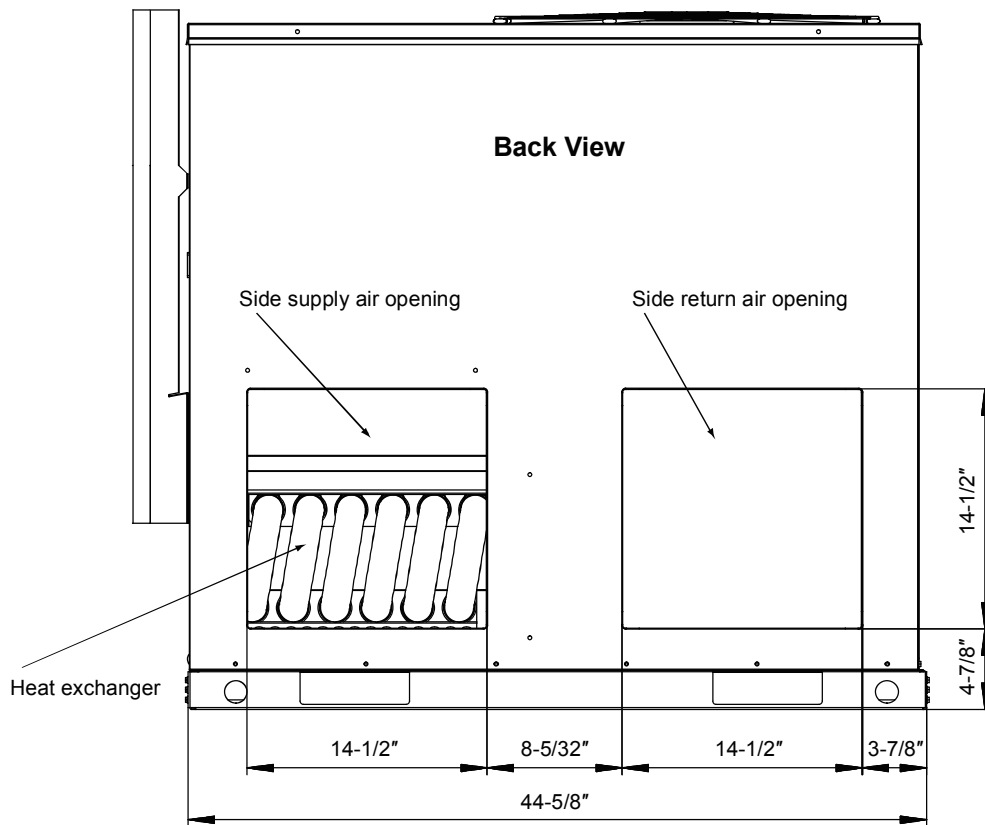

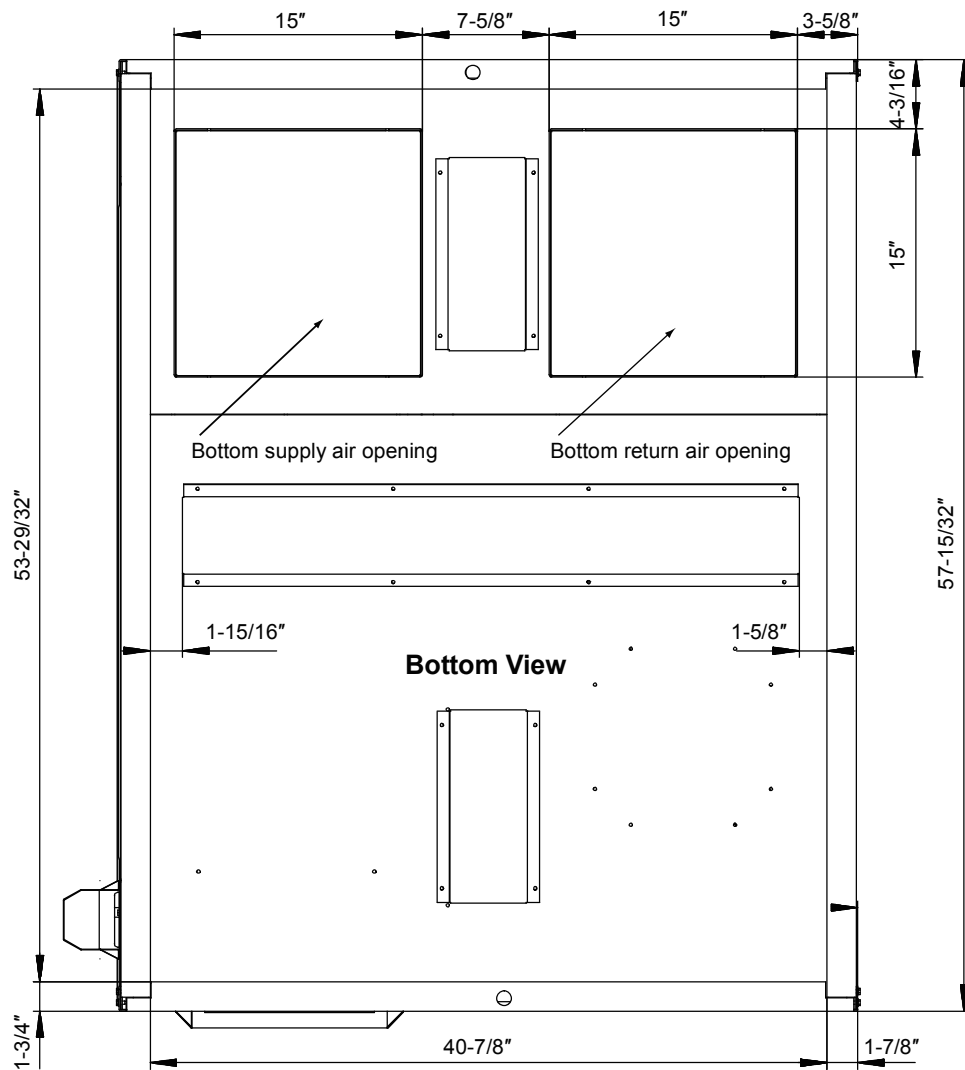

Dimensions Back and Bottom

PRODUCT SPECIFICATIONS

Specifications

MODEL	J4PG4048A1090BA
POWER CONNS. - V/PH/HZ	208/230/1/60
MIN. BRCH. CIR. AMPACITY	36.3
BR. CIR. PROT. RTG. - MAX. (AMPS)	60
SOUND POWER LEVEL[dB(A)]	63

GAS HEATING PERFORMANCE	
HEATING INPUT (Btu)	90,000
HEATING OUTPUT (Btu)	72,900
TEMP. RISE RANGE (°F)	25-55
AFUE (%)	81
GAS CONNS. PIPE SIZE	1/2

COMPRESSOR	SCROLL
NO. USED- NO. SPEEDS	1-1
VOLTS/PH/HZ	208/230/1/60
R.L. AMPS- L.R. AMPS	24.2 - 100

CONDENSER FAN	
DIA. (IN.)	22
TYPE DRIVE- NO. SPEEDS	DIRECT - 1
MOTOR HP	1/3
MOTOR SPEED R.P.M.	1100
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	1.6

CONDENSER COIL	Micro-channel
ROWS- F.P.I.	1-/
FACE AREA (SQ. FT.)	17.7
TUBE SIZE (IN.)	/

EVAPORATOR FAN	
DRIVE- NO. SPEEDS	DIRECT - 5
CFM VS. IN. WG.	See Fan Performance Table
MOTOR HP	3/4
MOTOR SPEED R.P.M.	1050
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	5.5

EVAPORATOR COIL	
ROWS- F.P.I.	3 - 14
FACE AREA (SQ. FT.)	8.7
TUBE SIZE (IN.)	3/8
REFRIGERANT CONTROL	ORIFICE

REFRIGERANT	
LBS. - R-410	7 LBS. - 1 OZ.

DIMENSIONS	D X H X W
CRATED (IN.)	44-5/8X41-7/16X57-7/16

WEIGHT	
SHIPPING (LBS.)	602
NET (LBS.)	584

Fan Performance Table

Motor Speed	AIR FLOW PERFORMANCE									
	J4PG4048A1090BA									
	External Static Pressure-Inches W.C.									
		0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
Low	CFM	1450	1403	1355	1296	1254	1212	1163	-	-
Middle- 1	CFM	1564	1514	1466	1420	1372	1332	1289	1251	1210
Middle- 2	CFM	1640	1594	1548	1505	1452	1415	1376	1338	1302
Middle-3	CFM	1790	1744	1704	1661	1621	1578	1535	1482	1427
high	CFM	1876	1843	1792	1751	1711	1647	1582	1521	1458

Features

- Single-stage gas (LP conversion kit provided with each unit) heating.
- Bottom or side air return.
- Aluminized steel tubular heat exchanger.
- Quiet multi-speed circulation blower.
- Direct spark ignition.
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J4PG4048A1090A-1A