

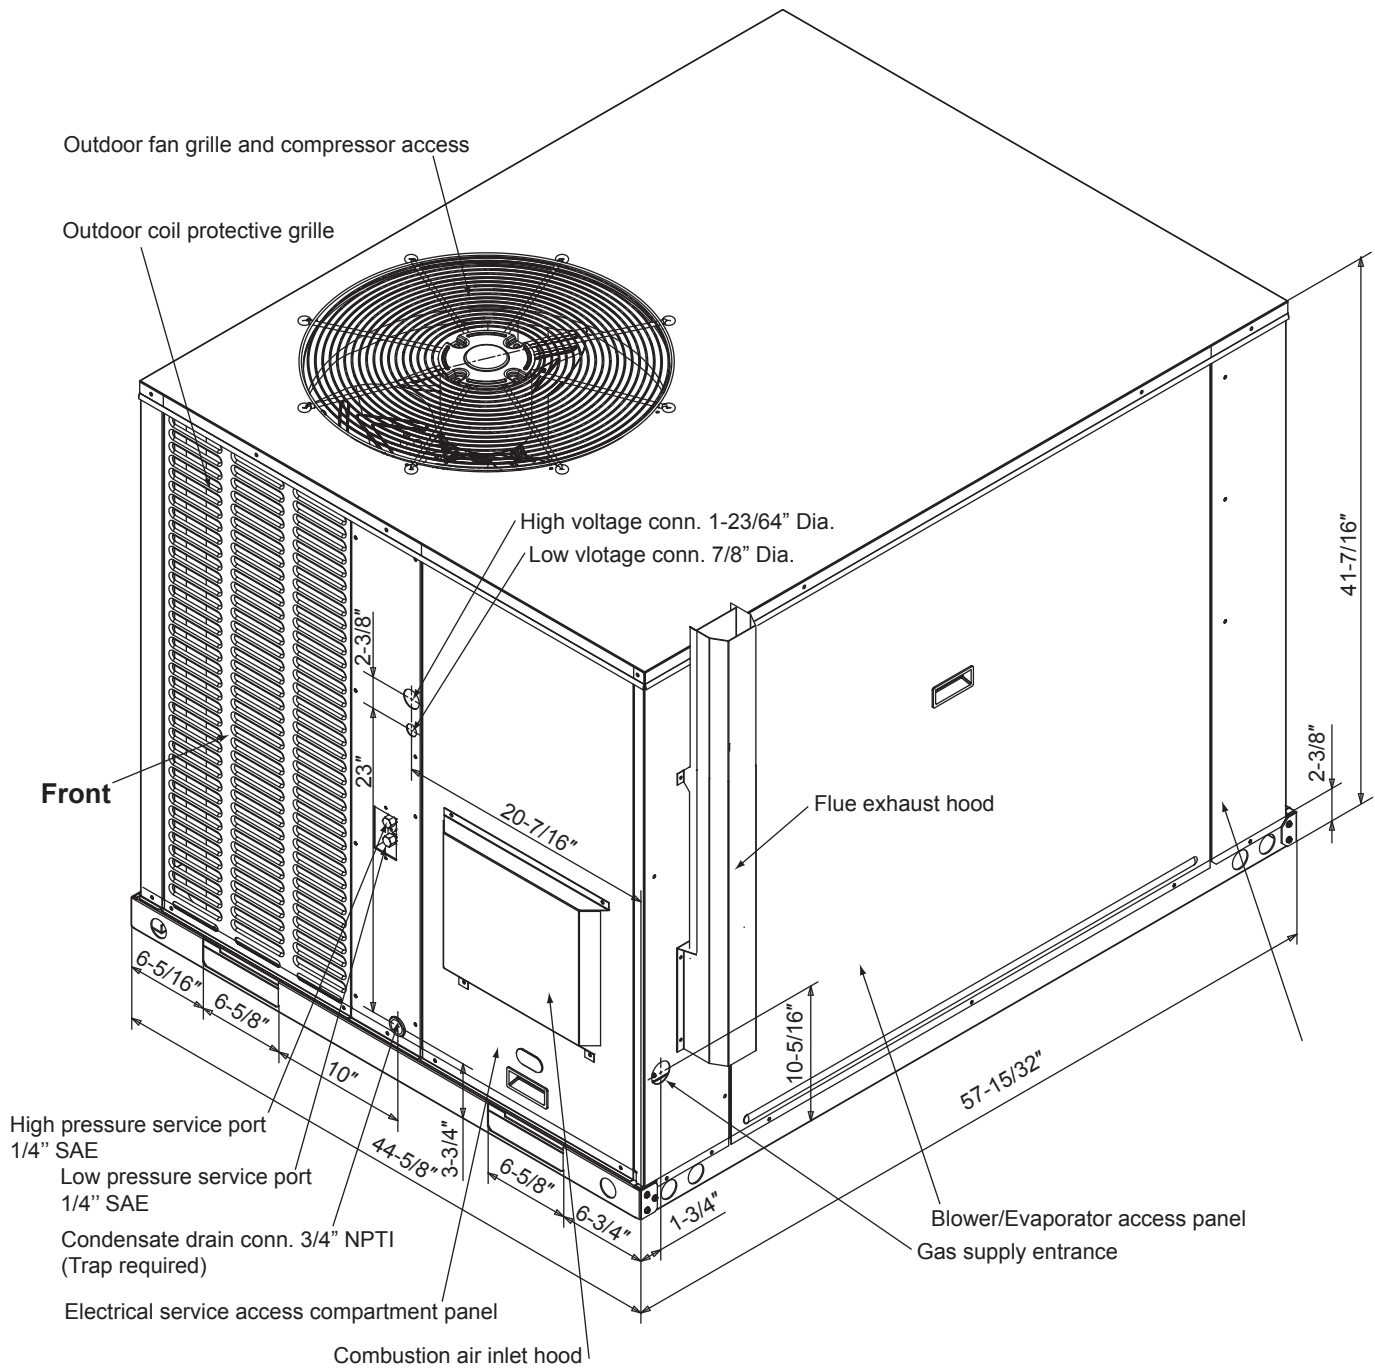


TAG: \_\_\_\_\_

# SUBMITTAL

## 5.0 Ton High-Efficiency Gas Package Unit J4PG4060A1130BA

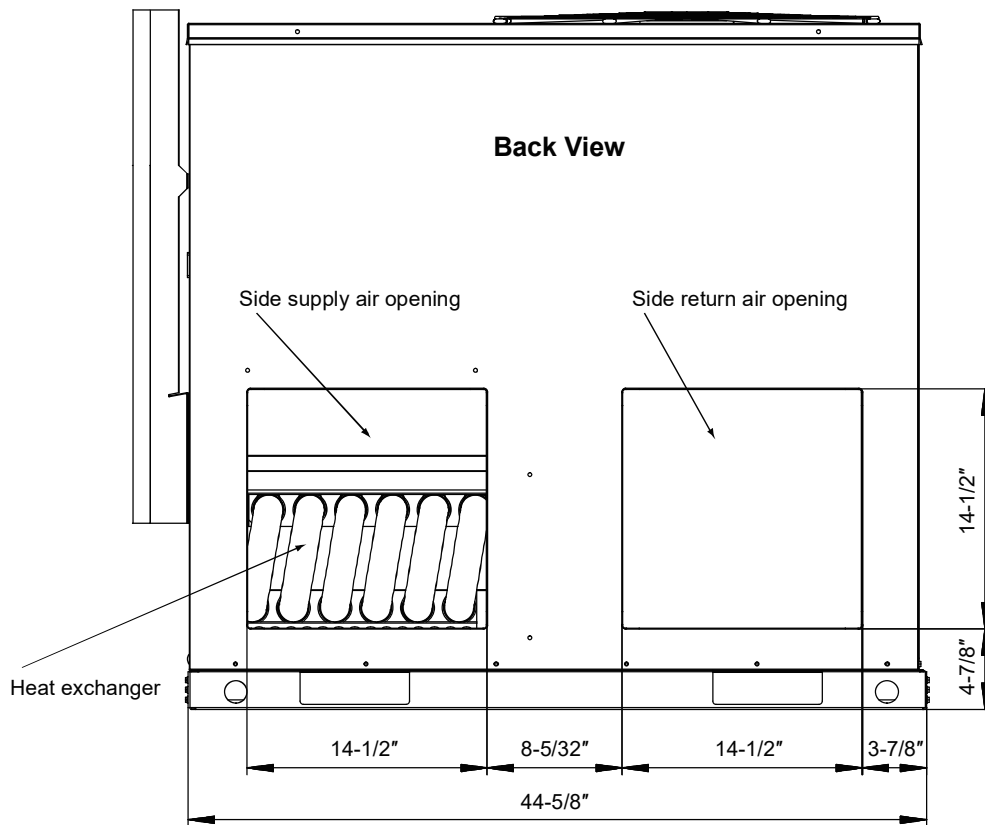

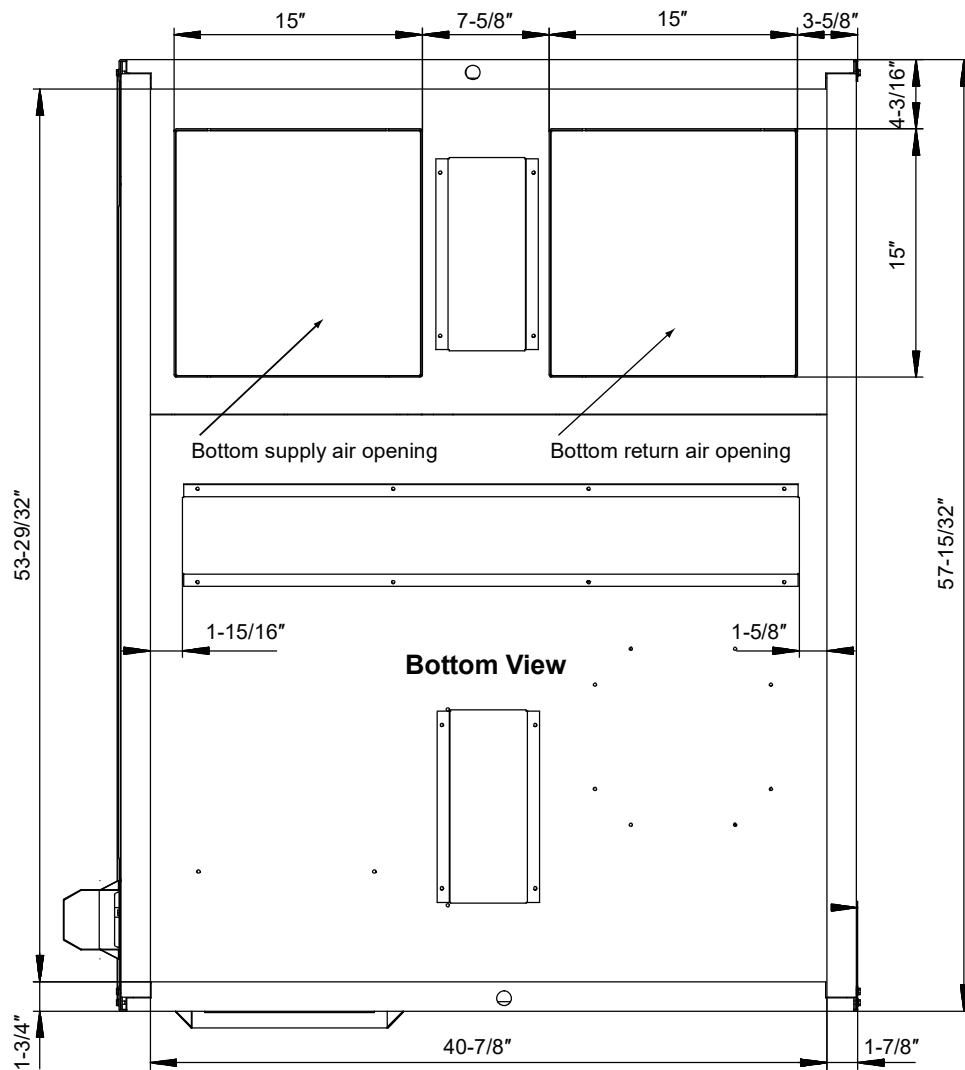

***Dimensions Back and Bottom***

## PRODUCT SPECIFICATIONS

### Specifications

|                                   |                 |
|-----------------------------------|-----------------|
| MODEL                             | J4PG4060A1130BA |
| POWER CONNS. - V/PH/HZ            | 208/230/1/60    |
| MIN. BRCH. CIR. AMPACITY          | 35.6            |
| BR. CIR. PROT. RTG. - MAX. (AMPS) | 60              |
| SOUND POWER LEVEL[dB(A)]          | 63              |
| GAS HEATING PERFORMANCE           |                 |
| HEATING INPUT (Btu)               | 130,000         |
| HEATING OUTPUT (Btu)              | 105,300         |
| TEMP. RISE RANGE (°F)             | 35-65           |
| AFUE (%)                          | 81              |
| GAS CONNS. PIPE SIZE              | 1/2             |
| COMPRESSOR                        | SCROLL          |
| NO. USED- NO. SPEEDS              | 1-1             |
| VOLTS/PH/HZ                       | 208/230/1/60    |
| R.L. AMPS- L.R. AMPS              | 22.2 - 127.9    |
| CONDENSER FAN                     |                 |
| DIA. (IN.)                        | 22              |
| TYPE DRIVE- NO. SPEEDS            | DIRECT - 1      |
| MOTOR HP                          | 1/3             |
| MOTOR SPEED R.P.M.                | 1100            |
| VOLTS/PH/HZ                       | 208/230/1/60    |
| F.L. AMPS                         | 1.6             |
| CONDENSER COIL                    | Micro-channel   |
| ROWS- F.P.I.                      | 1-/             |
| FACE AREA (SQ. FT.)               | 17.7            |
| TUBE SIZE (IN.)                   | /               |

|                     |                           |
|---------------------|---------------------------|
| EVAPORATOR FAN      |                           |
| DRIVE- NO. SPEEDS   | DIRECT - 5                |
| CFM VS. IN. WG.     | See Fan Performance Table |
| MOTOR HP            | 3/4                       |
| MOTOR SPEED R.P.M.  | 1050                      |
| VOLTS/PH/HZ         | 208/230/1/60              |
| F.L. AMPS           | 6.3                       |
| EVAPORATOR COIL     |                           |
| ROWS- F.P.I.        | 3 - 16                    |
| FACE AREA (SQ. FT.) | 8.7                       |
| TUBE SIZE (IN.)     | 5/16                      |
| REFRIGERANT CONTROL | ORIFICE                   |
| REFRIGERANT         |                           |
| LBS. - R-410        | 5 LBS. - 6 OZ.            |
| DIMENSIONS          | D X H X W                 |
| CRATED (IN.)        | 44-5/8X41-7/16X57-7/16    |
| WEIGHT              |                           |
| SHIPPING (LBS.)     | 628                       |
| NET (LBS.)          | 595                       |

### Fan Performance Table

| Motor Speed | AIR FLOW PERFORMANCE                 |      |      |      |      |      |      |      |      |      |
|-------------|--------------------------------------|------|------|------|------|------|------|------|------|------|
|             | J4PG4060A1130BA                      |      |      |      |      |      |      |      |      |      |
|             | External Static Pressure-Inches W.C. |      |      |      |      |      |      |      |      |      |
|             |                                      | 0    | 0.1  | 0.2  | 0.3  | 0.4  | 0.5  | 0.6  | 0.7  | 0.8  |
| Low         | CFM                                  | 1553 | 1493 | 1436 | 1382 | 1329 | 1270 | 1206 | -    | -    |
| Middle- 1   | CFM                                  | 1673 | 1620 | 1555 | 1507 | 1454 | 1392 | 1339 | 1273 | 1208 |
| Middle- 2   | CFM                                  | 1771 | 1720 | 1659 | 1602 | 1555 | 1493 | 1434 | 1377 | 1312 |
| Middle- 3   | CFM                                  | 1923 | 1872 | 1817 | 1758 | 1704 | 1656 | 1601 | 1545 | 1492 |
| High        | CFM                                  | 2033 | 1975 | 1919 | 1870 | 1814 | 1763 | 1715 | 1655 | 1601 |

# Features

---

- Single-stage gas (LP conversion kit provided with each unit) heating.
- Bottom or side air return.
- Aluminized steel tubular heat exchanger.
- Quiet multi-speed circulation blower.
- Direct spark ignition
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

**BX-PRQ-J4PG4060A1130A-1A**